



CHARACTERISTICS

- **ULTRA SMALL:**
SMALLEST SENSOR ON THE MARKET TODAY.
SMALL SIZE MEANS EASIER INSTALLATION ON TRICKY MACHINERY.
- **ULTRA FAST:**
NO MECHANICAL MOVING PARTS MEANS THE SENSOR CAN READ ANY PRACTICAL CYCLE SPEED.
- **ULTRA RELIABLE:**
COMPLETELY SOLID STATE OPERATION FOR HIGH RELIABILITY AND DURABILITY.
- **IP 67 PROTECTION.**
- **FULLY POTTED SOLID STATE DEVICE:**
MEANS CIRCUIT IS ISOLATED FROM THE ENVIRONMENT.
- **360° LED MONITORING:**
ALLOWS YOU TO SEE SIGNAL STATUS FROM ANY ANGLE.
- **NPN AND PNP:**
BOTH INCLUDED AS STANDARD.
- **M12 CONNECTOR:**
AUTOMOTIVE SPECIFICATIONS PROVIDES ROBUST WIRING SOLUTIONS.

ULTRASENSOR M18x1: ULTRA SMALL, ULTRA FAST, ULTRA RELIABLE

The *UltraSensor* has been designed as a next generation replacement of Proximity and Micro switch systems for monitoring spool movement in progressive divider elements.


The patented concept works by monitoring magnetic flux variations through a hall-effect sensor as the spool enters the sensing range.

There are no moving parts which means the solid state device is completely wear free.


NPN and PNP connection options are standard within the same sensor.



1655326 ULTRASENSOR M18x1

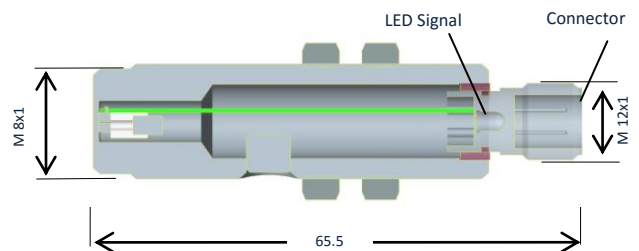

OPERATING PRINCIPLE

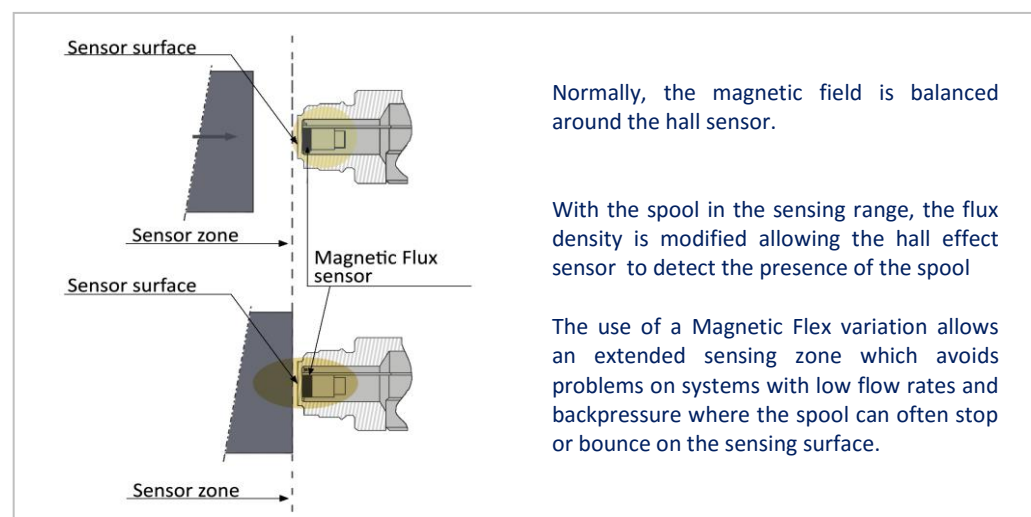


*Patented:
UltraSensor technology is protected by international patents.*

*Patented:
US 20080284415 A1*

TECHNICAL INFORMATION

TECHNICAL CHARACTERISTICS	
Material	AISI 316
Max. cycle per minute	1000
Voltage	8 ÷ 28 V DC
Short circuit protection	yes
Protection degree	IP 67
Operating temperature	-10 °C ÷ +60 °C (-4 °F ÷ +158 °F)
Connector	M12x1
Output signals	NPN 2A N.O - PNP 0,7A N.O.
Max allowable pressure on the front sensor surface	300 bar

MOUNTING INFORMATION

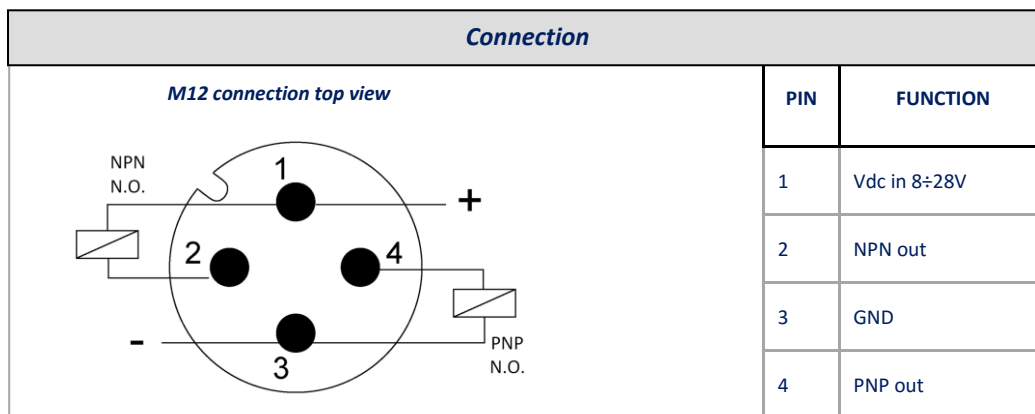

ORDERING INFORMATION

	Part. No.	Q.ty
Ultrasensor M18x1	1655326	<input type="text"/>

ACCESSORIES			
	M12 female connector	0039999	<input type="text"/>
	5 m cable, 90°- M12 female connector	0039815	<input type="text"/>
	2 m cable, M12 female connector	0039168	<input type="text"/>
	2 m cable, 90°- M12 female connector	0039830	<input type="text"/>

Info distributor: