

Grinding

dust suction filter



**3**  
**OPTIONAL**  
Filtro assoluto  
Filtre absolu  
Absolute filter  
Absolutfilter  
Filtro absoluto



**2**  
**OPTIONAL**  
Diffusore aria Triplex  
Diffusion d'air Triplex  
Triplex Air diffuser  
Verteiler Triplex  
Difusor de aire Triplex



**1**  
**OPTIONAL**  
Box insonorizzato per ventilatore  
Caisson insonorisant pour ventilateur  
Soundproof box for fan  
Schalldämmkapsel für Ventilator  
Box insonorizante y ventilador



Filtro aspiratore per polveri di molatura  
Groupe aspirofiltrant pour poussières de meulage  
Grinding dust suction filter  
Filterät für schleifstaub  
El filtro aspirador para polvo de amoladura


**PROVISIONAL  
BROCHURE**

**Micronfilter USA**


FILTRATION SOLUTIONS  
P.O. Box 1067  
San Marcos, Texas 78667 - USA  
Ph: 512-827-3701  
Fax: 512-777-4526  
www.micronfilterusa.com

www.micronfilter.it

# SHARP DUO DF 1

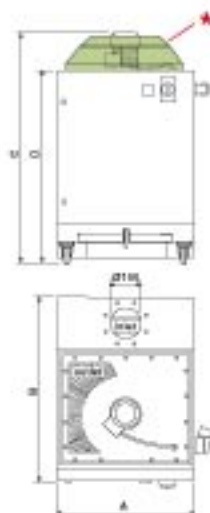

ROTAZIONE DEL BRACCIO: 360° (OPZIONALE)  
 360° (OPTIONAL)  
 360° (OPTIONAL)  
 360° (OPTIONAL)  
 360° (OPTIONAL)

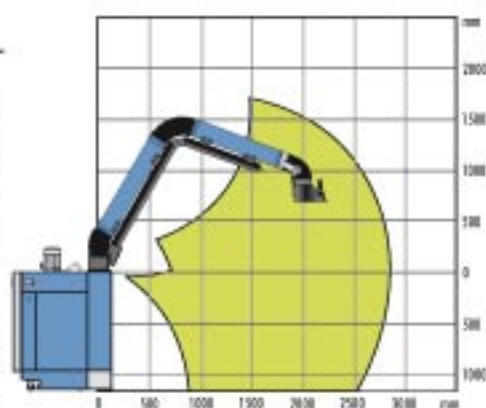

AREA DI LAVORO  
 SURFACE COUVERTE  
 WORKING AREA  
 ARBEITSBEREICH  
 AREA DE TRABAJO

- \*PULVISI INSONORIZZATO (OPTIONAL)
- \*PULVISI INSONORIZZATO (OPTIONAL)
- \*SCHALLDRUCK MITTEL (OPTIONAL)
- \*SCHALLDRUCK MITTEL (OPTIONAL)
- \*PULVISI INSONORIZZATO (OPCIONAL)

	SHARP DUO DF DFJET	A	B	C	D	E	F
DF1 0,75		675	905	1160	939	2360	1580
DF2 1,1		750	955	1382	1158	2579	1705
DF2 2,2		750	955	1422	1158	2579	1705

SHARP DUO DF	DF1	DF2	DF2	DF1-JET	DF2-JET	DF2-JET
POTENZA PUISSANCE MODEL Typ Modelo	1 HP 0,75 kW	1,5 HP 1,1 kW	3 HP 2,2 kW	1 HP 0,75 kW	1,5 HP 1,1 kW	3 HP 2,2 kW
PORTATA D'ARIA NOMINALE DEBIT D'AIR NOMINAL NOMINAL AIR FLOW NENN-VOLUMENSTROM CAUDAL DE AIRE NOMINAL	1450 m <sup>3</sup> /h 856 cfm	1880 m <sup>3</sup> /h 1109 cfm	2280 m <sup>3</sup> /h 1345 cfm	1450 m <sup>3</sup> /h 856 cfm	1880 m <sup>3</sup> /h 1109 cfm	2280 m <sup>3</sup> /h 1345 cfm
VENTILATORE VENTILATEUR FAN VENTILATOR VENTILADOR	PRM 220 Ø 320	PRM 250 Ø 340	PRM 250 Ø 355	PRM 220 Ø 320	PRM 250 Ø 340	PRM 250 Ø 355
ALIMENTAZIONE ELETTRICA DEL VENTILATORE ALIMENTATION ELECTRIQUE POUR LE VENTILATEUR FAN VOLTAGE SPANNUNG VENTILATOR ALIMENTACION ELECTRICA VENTILADOR	400 V 50 Hz	400 V 50 Hz	400 V 50 Hz	400 V 50 Hz	400 V 50 Hz	400 V 50 Hz
Giri TOURS R.P.M UMDREHUNGEN VUELTAS	2850	2846	2845	2850	2846	2845
60 Hz SU RICHIESTA - SUR DEMANDE - ON REQUEST - AUF ANFRAGE - A PETICION						
RUMOROSITA' NIVEAU SONORE AVERAGE SOUND LEVEL SCHALLDRUCKSTUFE NIVEL SONORO	72 dB 65 dB*	74 dB 70 dB*	74,5 dB 70 dB*	72 dB 65 dB*	74 dB 70 dB*	74,5 dB 70 dB*
NUMERO CARTUCCE NOMBRE DES CARTOUCHES NUMBER OF CARTRIDGES PATRONENANZAHL NUMERO DE LOS CARTUCHOS	1	2	2	1	2	2
DIMENSIONI DELLE CARTUCCE DIMENSIONS DES CARTOUCHES CARTRIDGES DIMENSION ABMESSUNGEN FILTERPATRONEN DIMENSIONES DE LOS CARTUCHOS	Ø 325 H400mm	Ø 325 H400mm	Ø 325 H400mm	Ø 325 H400mm	Ø 325 H400mm	Ø 325 H400mm
CLASSIFICAZIONE IFA/BGIA CLASSIFICATION IFA/BGIA IFA/BGIA RATING KLASSIFIKATION IFA/BGIA CLASSIFICACION IFA/BGIA	M CEL CELLULOSA - CELLULOSE CELLULOSE - CELLULOSE CELLULOSE	M CEL CELLULOSA - CELLULOSE CELLULOSE - CELLULOSE CELLULOSE	M CEL CELLULOSA - CELLULOSE CELLULOSE - CELLULOSE CELLULOSE	M PES POLIESTERE - POLYESTER POLYESTER - POLYESTER POLYESTER	M PES POLIESTERE - POLYESTER POLYESTER - POLYESTER POLYESTER	M PES POLIESTERE - POLYESTER POLYESTER - POLYESTER POLYESTER
SUPERFICIE FILTRANTE NOMBRE DES CARTOUCHES NUMBER OF CARTRIDGES PATRONENANZAHL NUMERO DE LOS CARTUCHOS	12 m <sup>2</sup>	2 x 12 m <sup>2</sup>	2 x 12 m <sup>2</sup>	8 m <sup>2</sup>	2 x 8 m <sup>2</sup>	2 x 8 m <sup>2</sup>
PESO POIDS WEIGHT GEWICHT Peso	115 kg 253 lb	150 kg 330 lb	165 kg 363 lb	125 kg 275 lb	160 kg 352 lb	175 kg 385 lb